


# AUTOMOTIVE ENHANCEMENT

Outstanding Automotive Products Since 1976

## Sheepskin Insert Cover Installation

1. To install it onto automobile seat, please remove seat headrest first, Then Place cover on the seat with the anti-slippery material facing down, and adjust it into correct place.
2. Put back the headrest:  
Locate position of two holes for headrest on the top of the seat-back, cut small slit on the sheepskin cover so that the holes can be seen.  
Place the headrest back to its original position.
3. From back of the seat, Pull elastic strap (Part A1) through the gap line between seat and seat-back till you can see the metal hook appears, then hooked it onto strap (Part B1) under the seat.
4. Repeat the same way to hook strap (Part A2) onto strap (Part B2) under the seat.

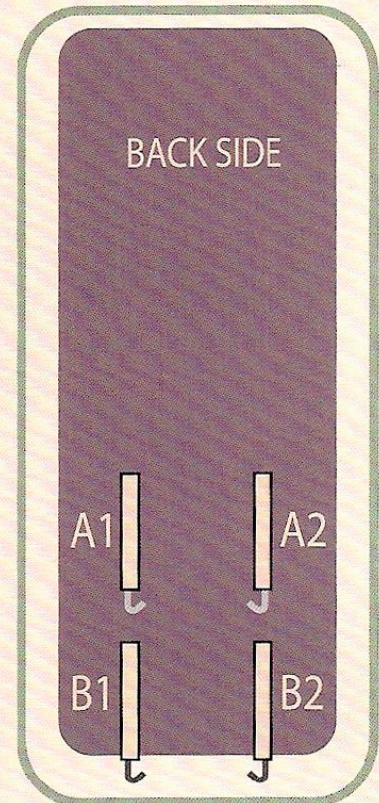

### CAUTION

• Keep eyes and face away from straps while installing as sudden release could cause injury.

**CARE INSTRUCTIONS:** Dry clean only.

Fax: 1-831-618-7888  
<http://www.autoenhance.com>  
Phone 1-800-259-1773  
email: [customerservice@autoenhance.com](mailto:customerservice@autoenhance.com)